

HYGIENE EQUIPMENT



TWO WAY COMPACT HYGIENE STATION 10.0210.00

The machine is designated for personal hygienic control when entering in and going out of working areas for large manufacturers with more than 50 people per shift.


There are two ways – entrance and exit. It consists of a hand disinfection unit with a turn-style, active (automatic level support) sole disinfection bath with drip-off one for entering section and pass through sole cleaning machine with turn-style for exit section. Entrance control – by hand disinfection unit, exit control – by photocell. Both turn styles are one-way.

A programmable controller SIEMENS, allowing settings of operating modes in a wide range, is used for station control.

The machine complies with the Council Directives No. 2006/42/EC and 2006/95/EC and USDA regulations.

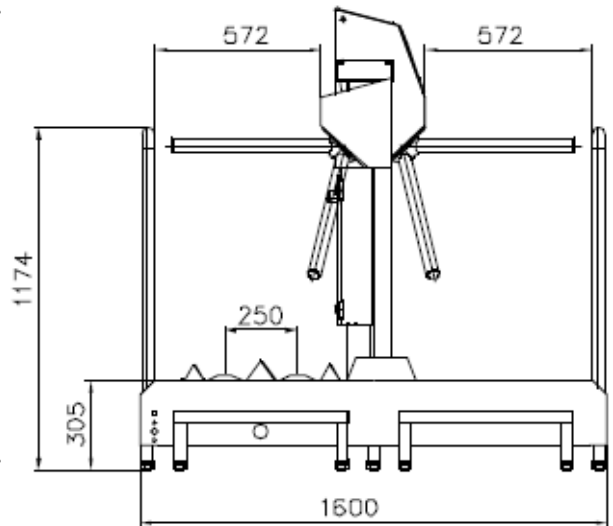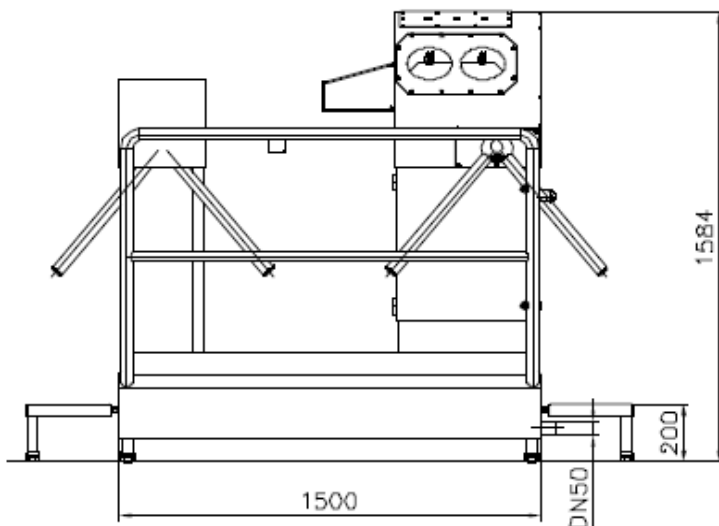

HYGIENE EQUIPMENT

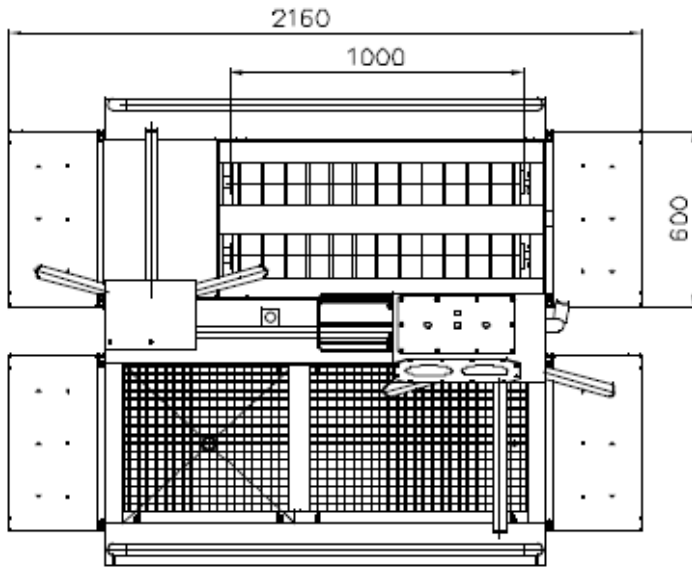

Technical data:

Power supply	V/Ph/Hz	400/3/50
Control voltage	V	24DC
Installed power	kW	~0.7
Water supply	bar	min 2
Water outlet	mm	Ø50
Weight	kg	~270
Passing time	sec	5-6 per section

Dimensions:

Length of body (without stairs)	mm	1500
Total length	mm	2160
Length of brushes	mm	1000/Ø170
Width	mm	1600
Height	mm	1584

HYGIENE EQUIPMENT



10.3030.00 – twin-pass, exit – turn style, sole and boot cleaning



10.6040.00 – twin-pass, entrance and exit – sole cleaning, turn styles with swing arms

HYGIENE EQUIPMENT

COMPACT HYGIENE STATION TWIN-PASS

Art. Number	10.0210.00	10.0042.13	10.3030.00	10.6040.00
Dimensions (L,W,H mm)	2160/1600/1584	2213/1840/1570	2558/2280/1585	2126/1600/1585
Hand disinfection unit/sink	yes/no	yes/yes	yes/no	yes/no
Turn style/gate	yes/no	yes/no	yes/no	yes/no
Disinfection bath/drip-off zone	yes/yes ENTRANCE	no/no	no/no	no/no
Brushes - soles/boots (length of horizontal/height of vertical in mm)	2x1000/NO EXIT	2x1000/no entrance and exit	4x700/3x300	2x1000/no entrance and exit
One-way/two-ways	two-ways	one-way	-	one-way
Execution left/right	left	10.0042.13/10.0043.13	10.3030.00/10.3031.00	10.6040.00/10.6041.00
Installation - floor/wall	yes/no	yes/no	yes/no	yes/no
Passing time (sec)	~ 5 at each side	~ 5 at each side	~ 7 at each side	~ 5 at each side
Instaled power (kW)	~0.7	~3	~1,2	~1,6
Power supply - electricity/water/steam/compressed air/drain	3x400 V / 50 Hz min. 2 bar water drain DN50	3x400 V / 50 Hz min. 2 bar water drain DN50	3x400 V / 50 Hz min. 2 bar water drain DN50	3x400 V / 50 Hz min. 2 bar water drain DN50
Miscellaneous	twin-pass /entrance and exit simultaneously/	twin-pass /entrance and exit simultaneously;/optionally montage of hands dryer	twin-pass /entrance and exit simultaneously;/ exit – turn style and boot cleaning	twin-pass /entrance and exit simultaneously;/ turn styles with swing arms